

An rogha is fearr

FIREBIRD



HEATING SOLUTIONS

SOLID FUEL HEAT EXCHANGER

Easily and safely integrate a solid fuel boiler into an existing pressurised heating system.

- Avoids replacing domestic hot water tank and awkward pipework installations.
- Designed and manufactured in Ireland.
- Meets all building regulations.
- CE approved.
- Easy to install.



WORKING TOWARDS A GREENER PLANET

Technical Specification:

Dimensions:

Width: 530mm

Depth: 208mm

Height: 734mm

Maximum System Pressure: 3 bar.

Temperature Operating Range:

Maximum temperature 110 °C.

Heat Exchanger Weight: 76kg (empty).

Water Capacity:


22 litre volume of water capacity.

Transfer Capacity:

One stove only to be connected to this unit. No multiple solid fuel systems.

Maximum system output 12kW.

Sales Code: ACCSFHEXH

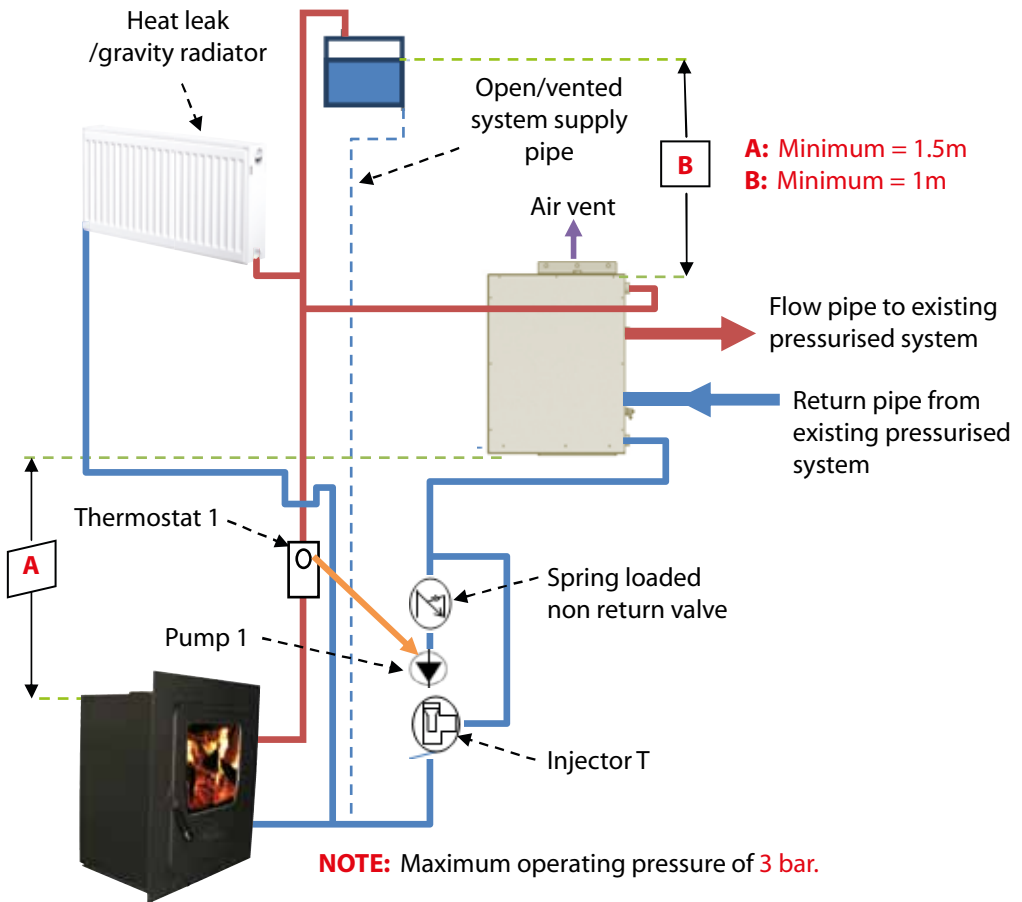

Firebird Heating Solutions Ltd.

Údarás Industrial Estate, Baile Mhic Íre, Co. Cork, P12 HK51, Ireland.

t: +353 (0)26 45253 e: info@firebird.ie www.firebird.ie